

Tru-Plank *Elite*



HOMESTEAD
TALLOWOOD

- ◆ Authentic timber designs, replicating the best of Australian and International species with on trend colours to transform your home or office.
- ◆ Heavy Commercial 0.70mm wear surface with a 2.5mm thickness suitable for commercial environments such as restaurants, offices, schools and salons which are subject to heavy foot traffic.
- ◆ **NO** locking mechanism to fail or break! Installed with a “hard set” adhesive to create a strong and stable floor.
- ◆ Moisture and humidity resistant, Tru-Plank Elite will withstand the harsh Australian climate and commercial demands.
- ◆ Underfoot comfort and stability, providing warmth in winter and coolness in summer.
- ◆ Low maintenance – Just vacuum and microfibre mop.
- ◆ MJS is an Australian family owned and operated business since 1967. Proudly supplying floorcoverings to Australia for generations.

AUSTRALIAN COLLECTION



HOMESTEAD
PAPERBARK



HOMESTEAD
IRONBARK



HOMESTEAD
MOUNTAIN ASH



HOMESTEAD
TALLOWWOOD



HOMESTEAD
FLOODED GUM




HOMESTEAD PAPERBARK




COUNTRY OAK


INTERNATIONAL COLLECTION

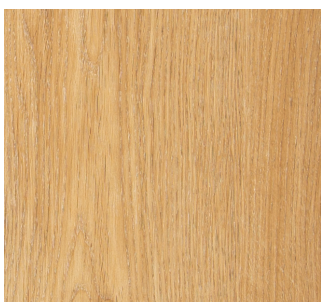


COUNTRY OAK

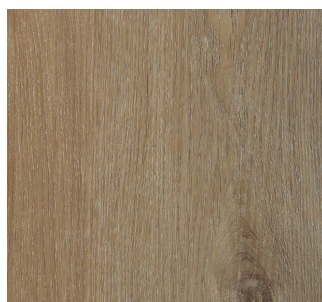


VALLEY OAK

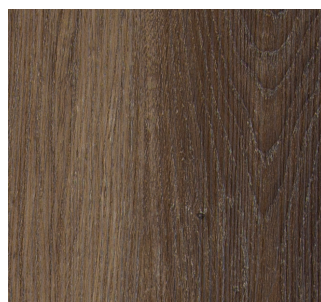


IRONSIDE OAK

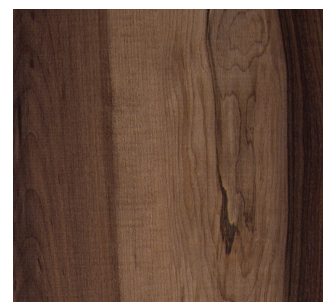


HARDWOOD MANHATTAN

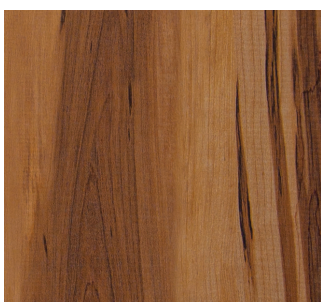

HARDWOOD BROOKLYN

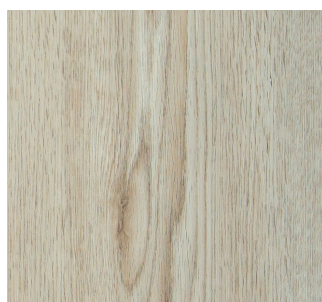

PROVINCIAL ASH

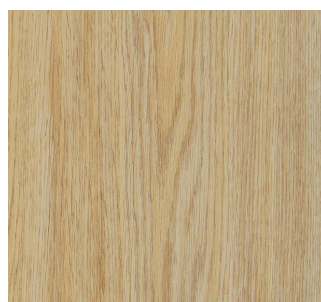


PROVINCIAL FAWN


Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar.

Technical Data


THICKNESS: 2.5mm		WEAR LAYER: 0.70mm		LENGTH: 1524mm		WIDTH: 228mm	
Type of floor covering	Luxury Vinyl Plank	Polyurethane Reinforced	YES PUR	Critical Radiant Flux	Pass		
Manufactured	China	Dimensional Stability	Residential, (avg, max)≤0.25%, Commercial, (max)≤0.2%, ISO 23999:2008	Smoke Development Rate	Pass		
Size	1524 x 228mm			Classification (Use Area)	Class 34, very heavy commercial		
m ² /carton	4.18						
Kg/carton	18.80	Residual Indentation	≤0.1mm, EN433				
Overall thickness	2.5mm	Castor Chair	Pass, EN425	Slip Resistance	R10		

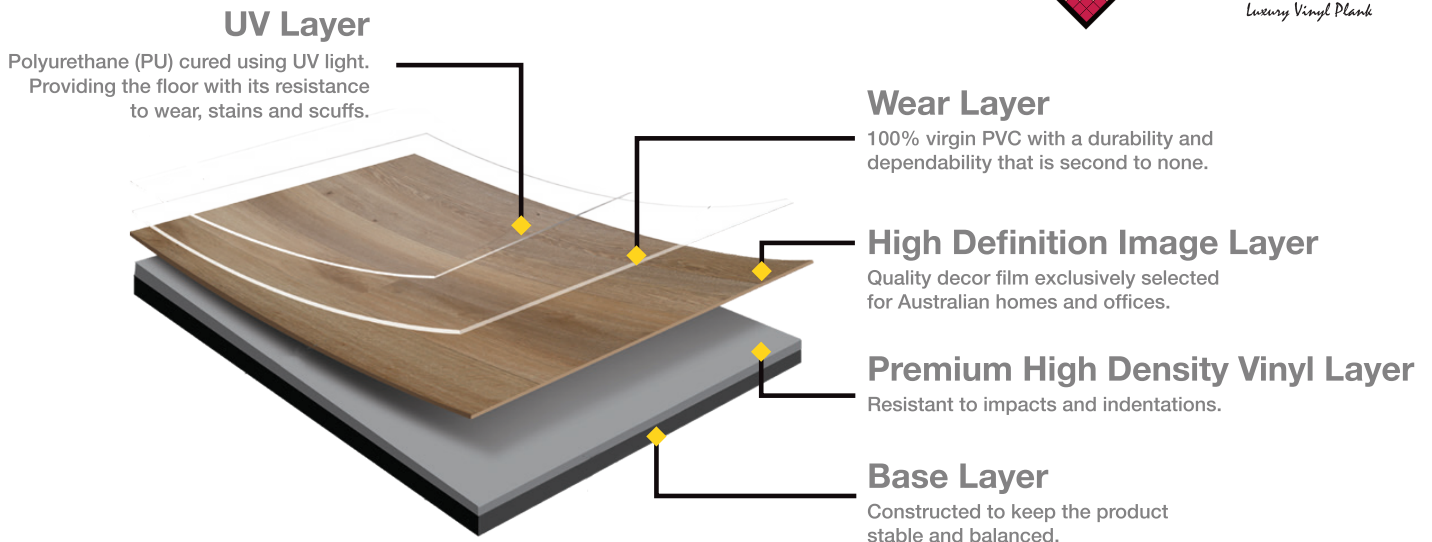

POLISHED CONCRETE COLLECTION

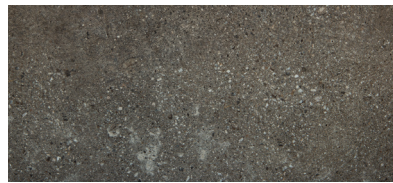

POLISHED CONCRETE FLINT

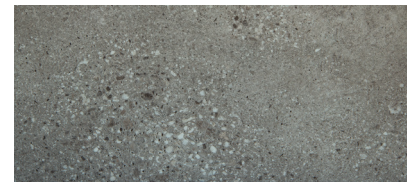

POLISHED CONCRETE PUMICE

THICKNESS: 2.5mm		WEAR LAYER: 0.70mm		LENGTH: 610mm		WIDTH: 305mm	
Type of floor covering	Luxury Vinyl Plank	Polyurethane Reinforced	YES PUR	Critical Radiant Flux	Pass		
Manufactured	China	Dimensional Stability	Residential, (avg, max)≤0.25%, Commercial, (max)≤0.2%, ISO 23999:2008	Smoke Development Rate	Pass		
Size	610 x 305mm			Classification (Use Area)	Class 34, very heavy commercial		
m ² /carton	3.72	Residual Indentation	≤0.1mm, EN433				
Kg/carton	16.20	Castor Chair	Pass, EN425	Slip Resistance	R10		
Overall thickness	2.5mm						



POLISHED CONCRETE FLINT

Please visit our website for guidelines and details. www.mjsfloorcoverings.com.au