


HEAVY DUTY

**viPro**  
CONTRACT FLOORS

**XTREME**  
WOODS



**Floorcoverings**

[WWW.MJSFLOORCOVERINGS.COM.AU](http://WWW.MJSFLOORCOVERINGS.COM.AU)

by **BEAU  
FLOR**<sup>®</sup>  
we decorate your floor

# XTREME<sub>WOODS</sub>

viPro  
CONTRACT FLOORS

## PRODUCT INFORMATION

Norm	EN ISO 10582	
Intensity of use	ISO 10874 EN 685	34 - 43
Total Thickness	EN ISO 24346 EN 428	2,00 mm
Wearlayer	EN ISO 24340 EN 429	0,70 mm
Abrasion group	EN 660-2	T
Total weight	EN ISO 23997 EN 430	2800 g/m <sup>2</sup>
Standard width	EN ISO 24341 EN 426	2 m
Standard length	EN ISO 24341 EN 426	22 m

## TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 EN 434	≤ 0,40 %
Curling	EN ISO 23999	≤ 8 mm
Light stability	EN ISO 105 B02	≥ 6 degrees
Residual indentation	EN ISO 24343-1 EN 433	≤ 0,10 mm
Impact sound improvement	EN ISO 717/2	Δ Lw 6 dB
Dynamic coefficient of friction	EN 13893	> 0,6
Slip resistance	DIN 51130	R10
Reaction to fire Report n° VNLF 031380.4	EN 13501-1	Bfl/S1
Underfloor heating	EN 12667	Suitable
Thermal resistance	ISO 8302	0,014 m <sup>2</sup> /Kw
Thermal conductivity	EN 12524	0,14 W/(m.K)
Chemical resistance	EN 423 ISO 26987	Resistant
Static Electrical Propensity	EN 1815	< 2kV on concrete
Delamination test (peel resistance)	EN ISO 24345	≥50N/50mm
Furniture leg resistance	ISO 16581 EN 424	no damage
Castor chair resistance	EN ISO 4918	Suitable (type wheel H)



Residential



Commercial



Floorcoverings

WWW.MJSFLOORCOVERINGS.COM.AU



Phthalate Free



Slovenian plant



Slovenian / Belgium plant



95CS Certified



Ausschuss zur gesundheitlichen Bewertung von Bauprodukten



UPEC  
4 3 2 2

Xtreme 344 - 006.1

Xtreme® 357 - 004.1



EN 14041

CE  
05

DOP: 450-SC0013-1

B.L.G. Flooring nv, Rijksweg  
442 B - 9710, Weisvelde, BELGIUM

NB-0534

Resilient floor covering for use  
within building



HEAVY DUTY




# XTREME WOODS



## COLOUR RANGE



Havanna Oak 602M

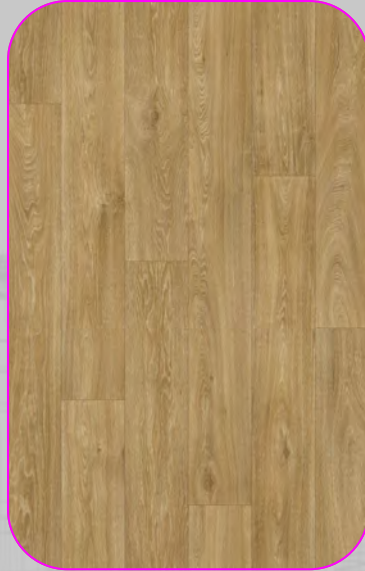

Havanna Oak 662M



Honey Oak 961M



Natural Beech 416M



Natural Oak 369M



Pure Oak 904M

WIDTH: 2M

THICKNESS: 2MM

WEAR LAYER: 0.70MM

LENGTH: 22M

[www.mjsfloorcoverings.com.au](http://www.mjsfloorcoverings.com.au)