
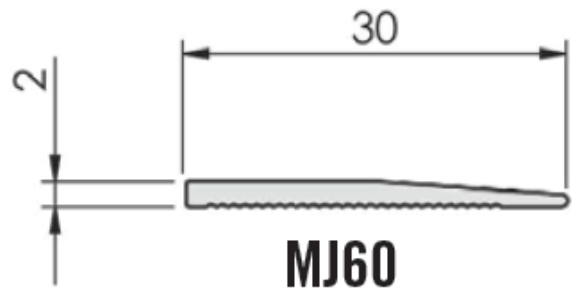


MJ60 - 2mm DIMINISHING STRIP

MJ60 is designed for use where 2mm vinyl tiles or sheetgoods meet concrete slab floors.

MJ60 is specified to withstand heavy traffic situations that may be encountered, for example – heavy, hard-wheeled stock carts or trolleys, as well as shopping trolleys.

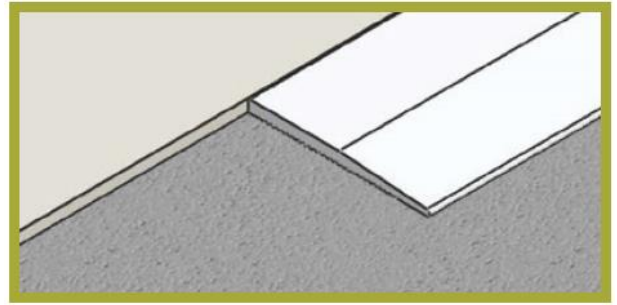

Product specifications

| | |
|---------------------|-------------|
| Product code: | MJ60 |
| Overall length: | 3.66m |
| Horizontal width: | 30mm |
| Vertical Height: | 2mm |
| Finish: | Mill Finish |
| Lengths per carton: | 10 |

Installation instructions

Cut the diminishing strip to your required length, then firmly retain the diminishing strip against the installed tiles to ensure no gapping.

Drill & Countersink fixing

MJ60 Diminishing strip may be secured in place by drilling and counter-sinking screw heads in a drill and plug installation (screws & plugs sold separately). Where this method is used it is recommended that a bead of silicone is run along both bottom edges of the extrusion to fill any surface variations of the concrete floor. This will help alleviate any subsequent “tapping” effect that could develop.

Adhesive fixing

MJ60 Diminishing strip may also be secured in place by using MJS GF400 adhesive. Apply as per the manufacturer’s directions to the underside of the construction cover, should a non-invasive fixing process be desired.

Safety statement: When cutting or drilling aluminium we recommend the use of safety glasses and gloves.

