


# MJ67G - 3MM EXPANSION JOINT COVER

MJ67G is designed for use where 3mm vinyl composite tiles or sheetgoods have been installed up to slab expansion joints where lateral movement may occur.

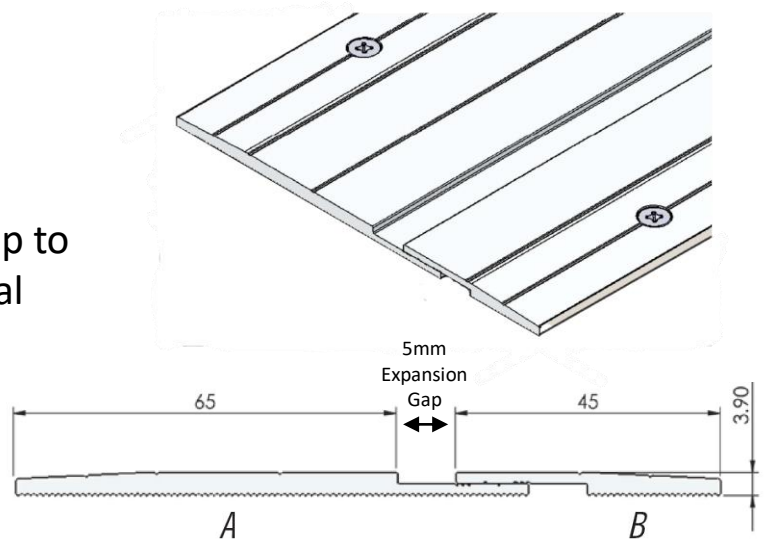

Note: Supplied as two pieces A + B

## Product specifications

Product code:	<b>MJ67G</b>
Overall length:	3.66m
Horizontal width:	110mm
Vertical height:	3.9mm
Lateral expansion:	+/-5mm
Anodised finish:	Silver
Countersunk hole centres:	300mm (screws & plugs supplied)
Lengths per carton:	5

## Installation instructions

1. Install wide base section (A) first. It is recommended that it be installed so the tile/sheet edge is 45mm to 50mm from the edge of the concrete control joint, which ensures the slab gap is covered by the 3.9mm aluminium thickness.
2. Firmly retain the aluminium expansion joint against the installed tiles or sheet to ensure no gapping. Using the wide base as a template drill 8mm holes in the slab to a depth of 35mm and secure using the supplied plugs and stainless steel screws. MJS GF400 construction adhesive can also be applied beneath the expansion joint to ensure that sub-floor irregularities are isolated and to help alleviate tapping.
3. The top narrow section (B) is then fitted to the opposite side of the slab joint using the same methodology as step number 3. ensuring that the resultant expansion gap between the two parts of the expansion joint should be 5mm as shown above.

**Safety statement:** When cutting or drilling aluminium we recommend the use of safety glasses and gloves.

**Disclaimer:** We recommend product selection is approved by the project engineer prior to installation. It is the responsibility of the customer to confirm the selected product is suitable for their project requirements.

