


Auditorium Curved Edge

RECOMMENDED FOR

#205, Auditorium Curved Edge is designed for multilevel curved indoor theatres. Typically there are many tiers of seating in semicircles with a stepped walkway for access. The seated landings and risers are carpet tiled.

#204, Carpet Tile Nosing is used on the stair edge to provide a firm and safe walking surface when ascending or descending.

#205, Auditorium Curved Edge butts up to #204 Carpet Tile Nosing to give the carpet tile a continuous protective curved edge.

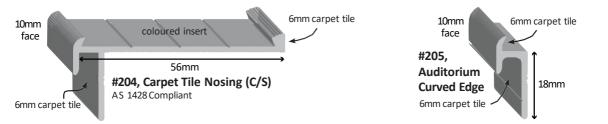

PERFORMANCE CHARACTERISTICS

#205, Auditorium Curved Edge is used behind seating in curved auditoriums. It is not designed as a stairnosing. It forms a curved edge between the riser and the landing to provide a protective edge for the carpet tile.

It is extruded to AS 1866-1997, anodised to GB 5237.2:2008. It curves by up to 1 meter over 3 meters.

It is fire rated to AS 9239.1.2003 with a Mean Critical Radiant Flux of 12.9W/m² and a Mean Smoke Development Rate of 2%-minutes. Both measures exceed the standards required in all building types.

INSTALLATION


1. Install before the carpet tile is laid at the leading edge where the riser meets the landing.

- 2. Align with the top of the riser and secure with screws using the screw line on the trim as a positioning guide.
- 3. If the auditorium platform is curved then curve the trim so that it follows the contour of the platform edge.
- 4. If a stair nosing is needed in an adjacent open walkway we recommend **#204, Carpet Tile Nosing** so that with **#205 Auditorium Curved Edge** they form a continuous line. But up to the front edge of the stair nosing.
- 5. After the Auditorium Edge and Nosing are installed, install the carpet tile on the riser and landing/platform.

		PHISICAL DATA		
Coating:	Matt Silver Anodising		Maximum curve:	1 meter over 3 meters
Length:	3.3m		Mean Critical Radiant Flux of 12.9W/m ² (AS 9239.1.2003)	
Packaging:	Carton of 10 lengths		Mean Smoke Development Rate of 2%-minutes (AS 9239.1.2003)	





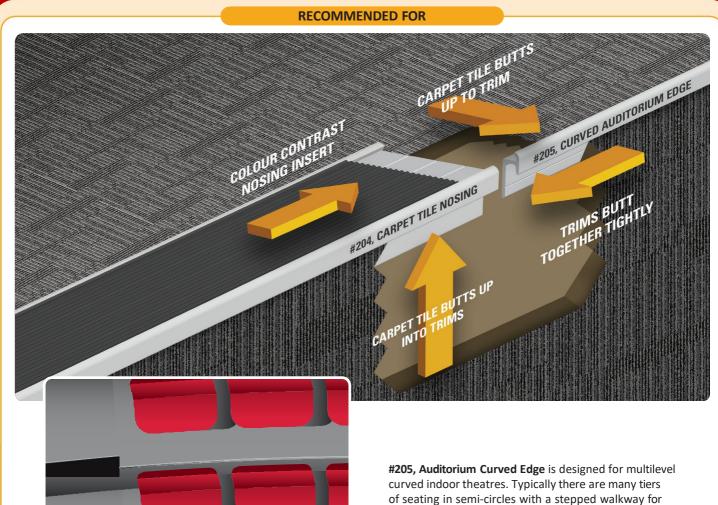

access. The seated landings and risers are carpet tiled. #204, Carpet Tile Nosing is used on the stair edge to

provide a firm and safe walking surface when ascending or descending.

#205, Auditorium Curved Edge butts up to **#204 Carpet Tile Nosing** to give the carpet tile a continuous protective curved edge.

