

PRODUCT DATA SHEET

PVC CO-EXTRUDED STAIR NOSING - SN30


RBM Plastic Extrusions 30mm Co-extruded Stair Nosing is manufactured to act as a Nosing profile on the edge of a Stair.

The 30mm Stair Nosing Profile is manufacture in Black, with a Yellow Strip as a visual aid. RBM is able to manufacture this profile with a different coloured strip if required.

The 30mm Co-extruded Stair Nosing is manufactured from Flexible PVC, which meets the requirements of “Best Practise Guidelines for PVC in the Built Environment” Clauses 7.1 and 7.2.

Product Specifications

	30mm Co-extruded Stair Nosing
Length	2.5 metres
Width	70.0mm
Height	30.0mm
Material	Flexible PVC
Finish	Matt
Lengths per pack	10 lengths

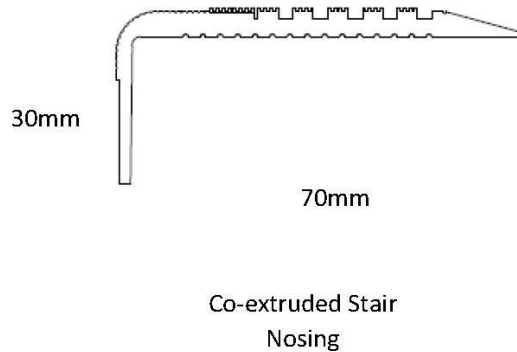

**All dimensions are nominal sizes*

Installation Instructions


The wall surface where the 30mm Co-extruded Stair Nosing is to be laid must be free of any moisture, dirt, dust, oil, cleaning agent or any other foreign matter that might be present around the area.

The adhesive that is recommended to be used with RBM 30mm Co-extruded Stair Nosing is the MJS Max Bond 102 Super Contact. This can be used for both Linear Installations and for contoured installations (avoid traffic until cured, approximately 6 hours).

Note: It is recommended that the back side of the Nosing be wiped with a rag dipped in white spirits before adhering, and ensure that all residue dries off before adhering.

In all cases please follow adhesive manufacturers usage and application recommendations. To apply adhesive

1. Apply adhesive to 30mm Co-extruded Stair Nosing by either brushing or rolling adhesive on. 2 coats are recommended.
2. Ensuring that wall and floor area is clean of foreign matter, brush or roll adhesive onto the area where the Stair Nosing is to be applied

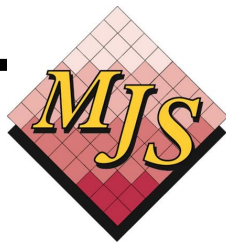

PRODUCT DATA SHEET

PVC CO-EXTRUDED STAIR NOSING - SN30

3. Allow both area to dry for 10 – 12 minutes, and then press the Stair Nosing onto the area it is to be applied to
4. Use hand roller to fit profile into desired area correctly

NOTE: This information and our technical advice – whether verbal or in writing are given in good faith but without warranty, and this also applies where proprietary rights of third parties are involved. Our advice does not release you from the obligation to check its validity and to test our products as to their suitability for the intended processes and use. Refer to relevant local, state, and federal construction codes and standards for requirements. Variations may occur between photographic images, samples and batches in terms of colour, shade, pattern or similar. All measurements are nominal.



<u>QLD</u>	<u>NTH QLD</u>	<u>NSW</u>	<u>ACT</u>	<u>VIC</u>	<u>TAS</u>	<u>SA</u>
35 Dividend St	1/ 12 Civil Road	2/ 4-7 Potter Close	6B / 3 Barrier St	82 Endeavour Way	101 Albert Rd	22 Fifth Street
Mansfield	Garbutt	Wetherill Park	Fyshwick	Sunshine	Moonah	Bowden
Ph: 07 3347 7300	Ph: 07 4728 8644	Ph: 02 9725 5519	Ph: 02 6239 1000	Ph: 03 9314 2872	Ph: 03 6228 1032	Ph: 08 8340 2266
Fax: 07 3343 9792	Fax: 07 4728 2496	Fax: 02 9725 5552	Fax: 02 6228 1430	Fax: 03 9314 6971	Fax: 03 6228 1035	Fax: 08 8340 2188