


FIBREGLASS STAIRNOSING – FSN70



- ✓ Industrial fibreglass stairnosing
- ✓ Heavy duty grit provides a non slip surface in wet and dusty environments
- ✓ Supplied in 1.2m lengths
- ✓ Available in Yellow finish
- ✓ Supplied undrilled

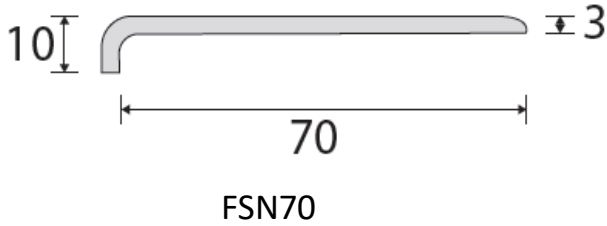

FSN70

Compliance

- ✓ Profile designed to comply with AS1428.1-2021
- ✓ Tested to the requirements of AS4586:2013 with a P5 Slip Resistance rating

CODE	DESCRIPTION	PK QTY
FSN70	70MM FIBREGLASS STAIRNOSING 1.2M X 70MM YELLOW	20

Installation instructions

Can be installed on a clean, smooth surface. Cut FSN70 to required length and drill and countersink at screw fixing locations. Secure in place by using MJS FGL adhesive and screw fixing (screws and plugs sold separately SS8G38).

Safety statement: When cutting or drilling fibreglass we recommend the use of safety dust mask, glasses and gloves.

Disclaimer: Whilst this profile complies to the above noted standards we recommend that the stairnosing selection is approved by the Project Certifier or Access Consultant prior to installation. It is the responsibility of the customer to confirm the compliance requirements for their project.

